



ALSD2 Siren Driver

Overview:

The ALSD2 is a high output very low current draw dual channel siren driver designed to work with alarm panels with limited current capability.

Specifications:

- 6VDC or 12VDC operation.

Parallel or series speaker wiring

103 db @ 10 ft. @ 6V - 8 Ohms

105 db @ 10 ft. @ 6V - 4 Ohms


106 db @ 10 ft. @ 12V - 8 Ohms

111 db @ 10 ft. @ 12V - 4 Ohms

Current draw range from 0.3A to 1.22A based on speaker impedance and supply voltage.

- Two (2) channel operation - steady or yelp.
- Very low current draw.

Board Dimensions (approximate): 2.5" x 1.9" x 1.1" (63.5mm x 48.3mm x 27.9mm)

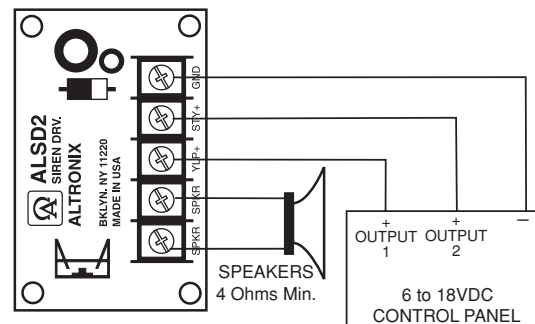

Installation Instructions:


1. Mount the ALSD2 in desired location.
2. Connect 4 Ohm or 8 Ohm speakers to terminals marked [SPKR] (see suggested speaker wiring diagrams below).
3. Connect 6VDC to 12VDC from output terminals on control panel or other desired power source (observing polarity) to [GND] and [STY+] or [YLP+] on ALSD2.

Note: Steady tone overrides yelp tone if both channels are triggered simultaneously.


Voltage	Current Drain	Load
6V	0.3A	8 Ohms
6V	0.61A	4 Ohms
12V	0.55A	8 Ohms
12V	1.22A	4 Ohms

Typical Speaker Wiring Diagrams:


Two (2) Speakers, 8 Ohms each

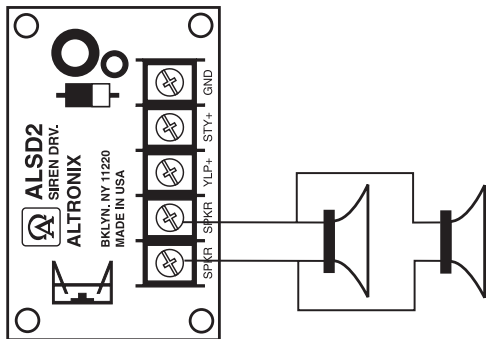


Three (3) Speakers, 8 Ohms each

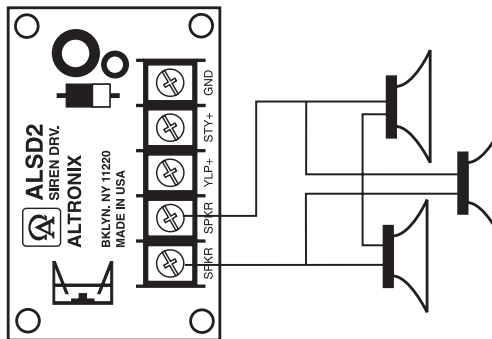

Four (4) Speakers, 4 or 8 Ohms each

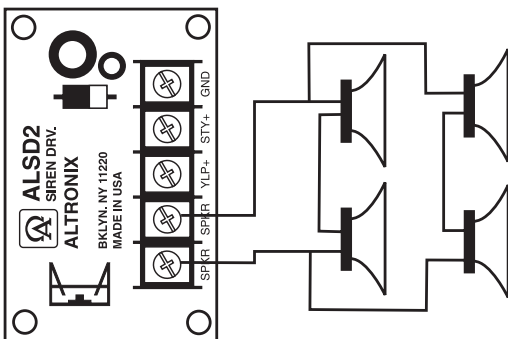

Two (2) Internal/External Hook-up

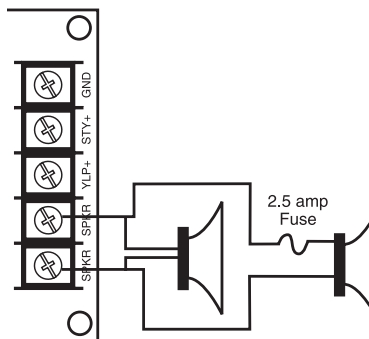

Fusing External Speakers:

Speakers that are accessible from outside a building should have a 2.5A fuse placed in series with the speaker leads so that any attempt to short the speaker leads will blow the fuse on that speaker while other speakers will continue to operate.

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA, 718-567-8181, fax: 718-567-9056

web site: www.altronix.com, e-mail: info@altronix.com. Lifetime Warranty, Made in U.S.A.

IIALSD2 - Rev. 070202

F20P

