


RF COAXIAL FIXED ATTENUATORS

DC - 3000 MHz

BDA-NATTEN-xxxx


Product Features

- Passive devices designed in a coaxial configuration
- Nominal impedance is 50 ohms
- Power level 5W
- N male type connectors as standard, other types available upon request

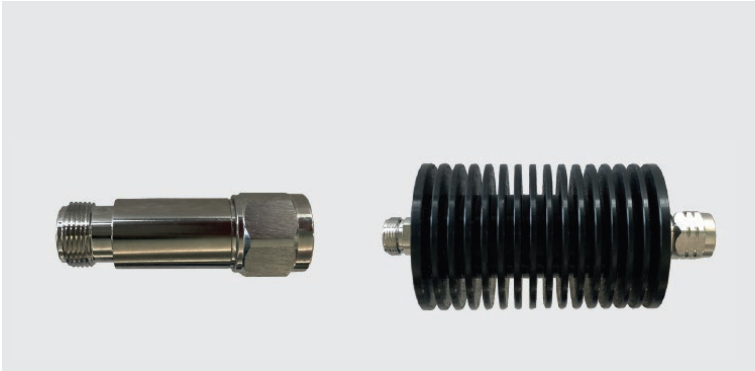


Specification	0503	0505	0510	0515	0520	0530
Attenuation value	3	5	10	15	20	30
Frequency band	DC - 3000 MHz					
Input power	5W: replace "xx" with 05 50W: replace "xx" with 50					
Coolant	Natural convection			Natural convection		
Type	In-line, coaxial			In-line, coaxial		
Impedance	50 Ω			50 Ω		
VSWR	1.20:1 min			1.20:1 min		
Connector	N(m)			N(m)		
Temperature range	-22° to 149° F -35° to +65° C			-22° to 149° F -35° to +65° C		
MTBF	>1,000,000 hours			>500,000 hours		
Weight	0.22 lbs • 0.10 kg			1.1 lbs • 0.5 kg		
Environmental	IP60			IP60		
Operating position	Any			Any		

AT-05xx

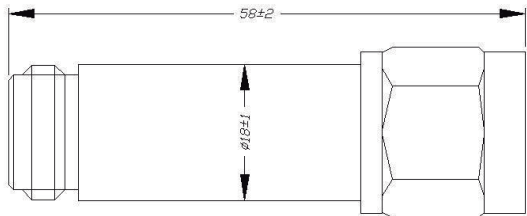

AT-50xx

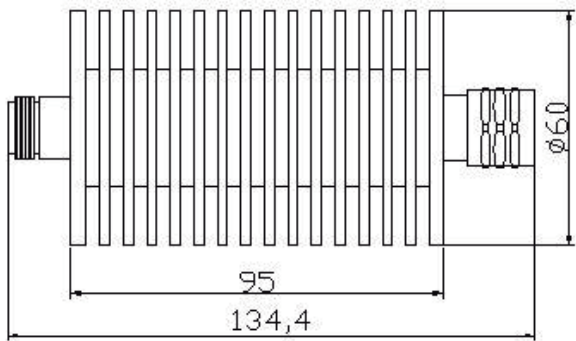

DOC HON-62069.01 • 10202020 • DM

Honeywell Business Solutions
715 Peachtree Street NE
Atlanta, GA 30308
www.honeywell.com

HON-62069.01 • 10202020
©2020 by Honeywell International Inc. All rights reserved.
Unauthorized use of this document is strictly prohibited.
This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.
Country of origin: U.S.A.

**THE
FUTURE
IS
WHAT
WE
MAKE IT**

Honeywell