

N MALE TO N FEMALE ADAPTER 0 - 6GHz

BDA-NMRA-NFRA

Product Features


- N female to N male adapter
- Right Angle 90°



Electrical Specifications	Value
Impedance	50Ω
Frequency range	0~6GHz
Withstand Voltage	500V rms
VSWR	Rigth Angle ≤ 1.25
Contact resistance	center contact ≤ 1mΩ outer contact ≤ 1mΩ
Insulation resistance	≥5000MΩ

Mechanical Specifications	Value
Temperature range	-65°C~+165°C
Durability(matings)	> 500

Material Specifications	Value
Body	Brass Nickel Plated
Center conductor	Brass Gold plated
Crimping suite	Copper alloy Nickel plated
O-ring sealing	6146 silastic
Insulator	PTFE

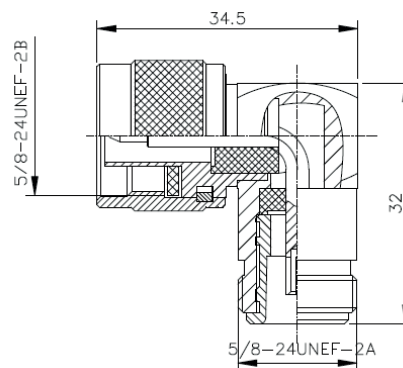

DOC HON-62081.00 • 11122020 • DMC

Honeywell Business Solutions
715 Peachtree Street NE
Atlanta, GA 30308
www.honeywell.com

HON-62081.00 • 11122020
©2020 by Honeywell International Inc. All rights reserved.
Unauthorized use of this document is strictly prohibited.
This document is not intended to be used for installation purposes. We try to keep
our product information up-to-date and accurate. We cannot cover all specific
applications or anticipate all requirements. All specifications are subject to change
without notice.
Country of origin: U.S.A.

**THE
FUTURE
IS
WHAT
WE
MAKE IT**

Honeywell