

WEATHERPROOFING SILICONE COLDSHRINK FOR EOL ASSEMBLY, 9.8"L


BDA-WPK-ATBC40_01

Product Features

- Silicone Rubber
- Flame Retardant UL94-HB
- Extra duration
- Weatherproof Silicon Rubber



Specifications	Value
Material	Silicone Rubber
Hardness, Shore A	35 - 45
Specific Gravity (25 °C)	1.08 1.16
Color	Grey (Pantone 431U)
Flame Retardant	UL94-HB
Tensile Strength	≥ 7.0 MPa (23 °C ASTM D412)
Elongation	≥ 650% (23 °C ASTM D412)
Tear Strength	≥ 25 KN/m (23 °C ASTM D 624)
Temperature Range	-6 0 °C 200 °C
Ozone Resistance	70h, ASTM D518-A
UV Resistance	1000h, ISO4892.3 Cycle1
Mold Resistance	IEC60068-2-10 , Class 1
Hose Clamp	Includes 2 (16-25 mm)
Life Time	20 Years
IP Grade	IPx8 (IEC 60529)
Dimensions	40 x 10 x 250 mm

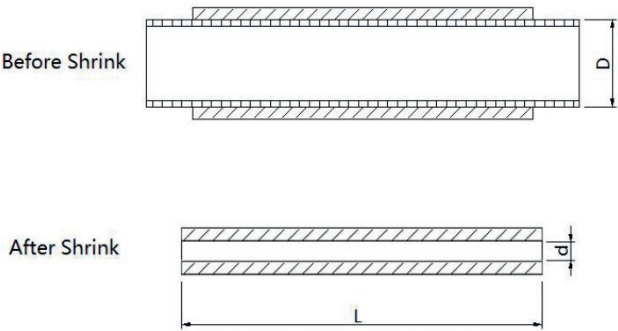

DOC HON-62100.00 • 11272020 - DMC