

IX-DVF-4A


IP Video Door Station

The IX-DVF-4A is a flush-mount weather-resistant IP video door station with four labeled buttons for selective calling. It connects to the network using Cat-5e/6 cable and is SIP compliant.

Equipped with a 1.23 megapixel fixed camera, its angle can be vertically adjusted using a lever on the back of the station. Video can be streamed to third-party devices using ONVIF® Profile S or RTSP. Audio and video can be stored on a microSD™ card.

The station has a 600Ω output that can be used for paging or communication. Two contact outputs can be programmed to activate when door release is triggered or based on a specific status. Two inputs can be used to trigger an outgoing call or answer an incoming call or page.

There are audible and visual indicators for calling, communication, and door release. Sound files can be uploaded for custom messages to be played during door release, call placed, communication start, error message, and more.

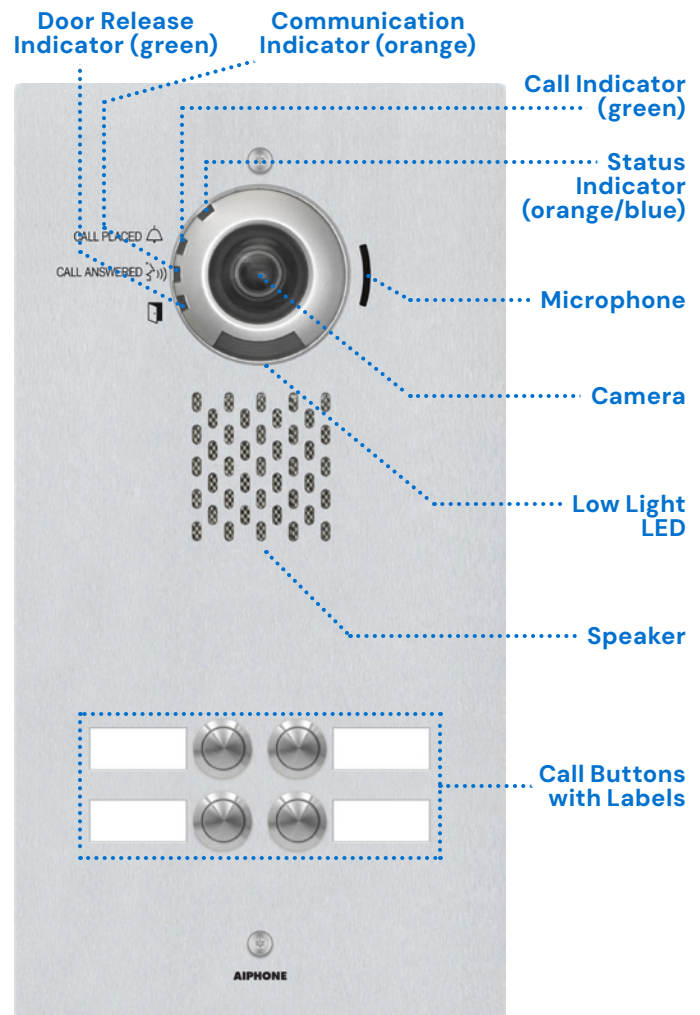

- **SIP compliant**
- **1.23 megapixel fixed video camera**
- **White LED for low light illumination**
- **ONVIF® Profile S compliant**
- **Camera vertical adjustment
+15°, 0°, or -8° (manual)**
- **Weather and vandal resistant**
- **Four labeled call buttons (blank
template included)**
- **Two contact outputs**
- **Two trigger inputs**
- **Stainless steel**
- **PoE (802.3af)**
- **PoE passthrough (requires
802.3at Type 2 PoE+)**

Power Source PoE (IEEE 802.3af class O) or 24V DC (PS-2420UL)

Power Draw 5.28W

Camera 1/3" CMOS 1.23 megapixel

Min Illumination 5 lux

Audio Codec G.711 (μ-law, A law), G.722

Video Codec H.264/AVC, motion JPEG

Protocols IPv4, IPv6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP, RTCP, IGMP, MLD, SMTP, SFTP, DHCP, NTP, DNS

Port Security IEEE 802.1X

Operating Temp -40° ~ 140°F (-40° ~ 60°C)

Protection IP65, IK08

Dimensions 13 11/16 in H 7 3/16 in W
347.7 mm H 182.6 mm W