




Specifications:

- 12VDC or 24VDC selectable operation.
- Current draw 15mA.
- Factory set for 12VDC; cut jumper J1 for 24VDC operation.
- 1A/120VAC or 2A/28VDC DPDT contacts
- DIN Rail mountable (order part # CLIP4).
- Board dimensions (W x L x H):
2" x 2.75" x 1" (50.1mm x 69.9mm x 25.5mm)


Dry Contacts




Latching Dry Contacts

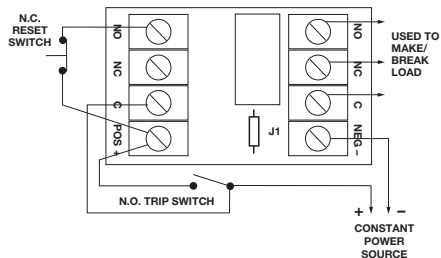

Polarity Reversal

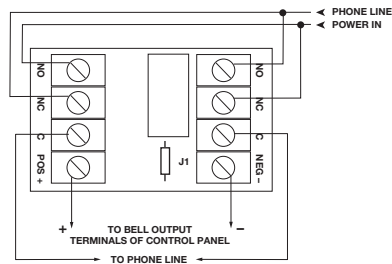

Line Seizure

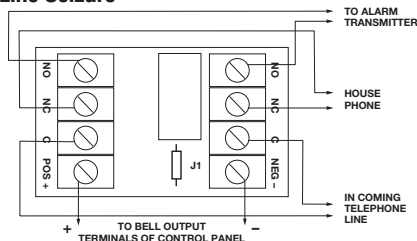

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.