

STI STOPPER® STATION SERIES



KEY FEATURES

General Information

- Multipurpose push button switches cover a wide range of applications both indoors and outdoors.
- Three year guarantee against breakage of polycarbonate in normal use (one year on electro mechanical and electronic components).

Design

- Unique, curved design helps protect against accidental activation.

Construction

- Station housing molded of tough polycarbonate.
- UL Listed to U.S. and Canadian safety standards (excludes pneumatic SS2xy8).
- Stainless steel backplate.
- Push buttons are ADA Compliant (excludes SS2xy3).

Installation

- 5VA flammability rating on backplate and spacer.
- Typical working properties of polycarbonate are -40° to 250°F (-40° to 121°C).

Options

- Your choice of colors — red, green, yellow, white, blue or orange.
- Standard or custom text or hi-res logo.
- Custom text in any language.
- Protect with STI indoor/outdoor protective covers.

PRODUCT OVERVIEW

These ADA Compliant, multipurpose push button switches cover a wide range of applications both indoors and outdoors. They're called Stopper Stations. They incorporate a unique, patented design that helps dramatically to stop accidental activation. A number of standard models are available or we can create custom units to meet your needs exactly. You have your choice of any of six universal shell colors, several button styles, standard or custom wording and language.

HOW THEY WORK

Because of their superior, patented design combined with quality construction throughout, you can expect outstanding performance for years to come. In fact, many STI customers are surprised to find that all this quality is available at no increase in price. Plus, customers appreciate the option to protect the switches with STI protective covers that carry a three year guarantee against breakage in normal use, one year on electro mechanical and electronic components. For indoor applications, you can order your Stopper Station with a pre-alarm cover to help stop malicious and accidental activation.



STI Stopper® Station Series

Dimensions and Technical Information

UNIQUE BUTTON FEATURES

Models SS2xy0, SS2xy1, SS2xy3, SS2xy4

- Interchangeable or replaceable N.O. or N.C., SPST gold-plated contact blocks rated for 3 amps @ 600 VAC or 1 amp @ 250 VDC.
- Standard switch includes one N.O. and one N.C. contact. Holds up to three individual isolated contacts.
- Rated for 6000 operations (excludes SS2xy3).

Note: some standard single gang boxes need additional depth. To add 5/8" depth, order KIT-102722-color (B=blue, G=green, R=red, Y=yellow, W=white, E=orange).

Models SS2xy2, SS2xy5, SS2xy9

- Two (2) Form "C" contacts, DPDT, rated 10 amps @ 125/250 VAC, 6 amps @ 30 VDC.
- Configurable multicolor LED illumination bar (12-24 VAC/VDC); illumination is optional (red, green, or white).*
- 100,000 operations.

Model SS2xy6

- Two (2) Form "C" contacts, DPDT, rated 10 amps @ 125/250 VAC, 6 amps @ 30 VDC.
- 12-24VAC/VDC LED.*
- 100,000 operations.


Model SS2xy7

- Two (2) Form "C" contacts, DPDT, rated 10 amps @ 125/250 VAC, 6 amps @ 30 VDC.
- Operating range -31°F to 150°F (-35°C to 66°C).
- 12-24VAC/VDC LED.*
- Weather resistant, suitable for indoor or outdoor use without a cover.
- 100,000 operations.

Model SS2xy8 - Not UL Listed.

- Switch rating 10 amps resistive at 120-240 VAC and has a timer range: 4 - 60 seconds (± 15%) with repeat accuracy ± 10%.
- Indoor use only. Not recommended for outdoor/water applications, temperature range of button 15° to 120°F (-9° to +49°C).
- Timer life of over 1,000,000 operations.
- Pneumatic adjustable timer opens or closes a circuit and has a timed delay before reset. No electricity to operate.
- Configurable multicolor LED illumination bar (12-24 VAC/VDC); illumination is optional (red, green, or white).*
- Ideal for security applications.
- 1 Form Z, 1 N.O. and 1 N.C. contact.

* Power supply not included

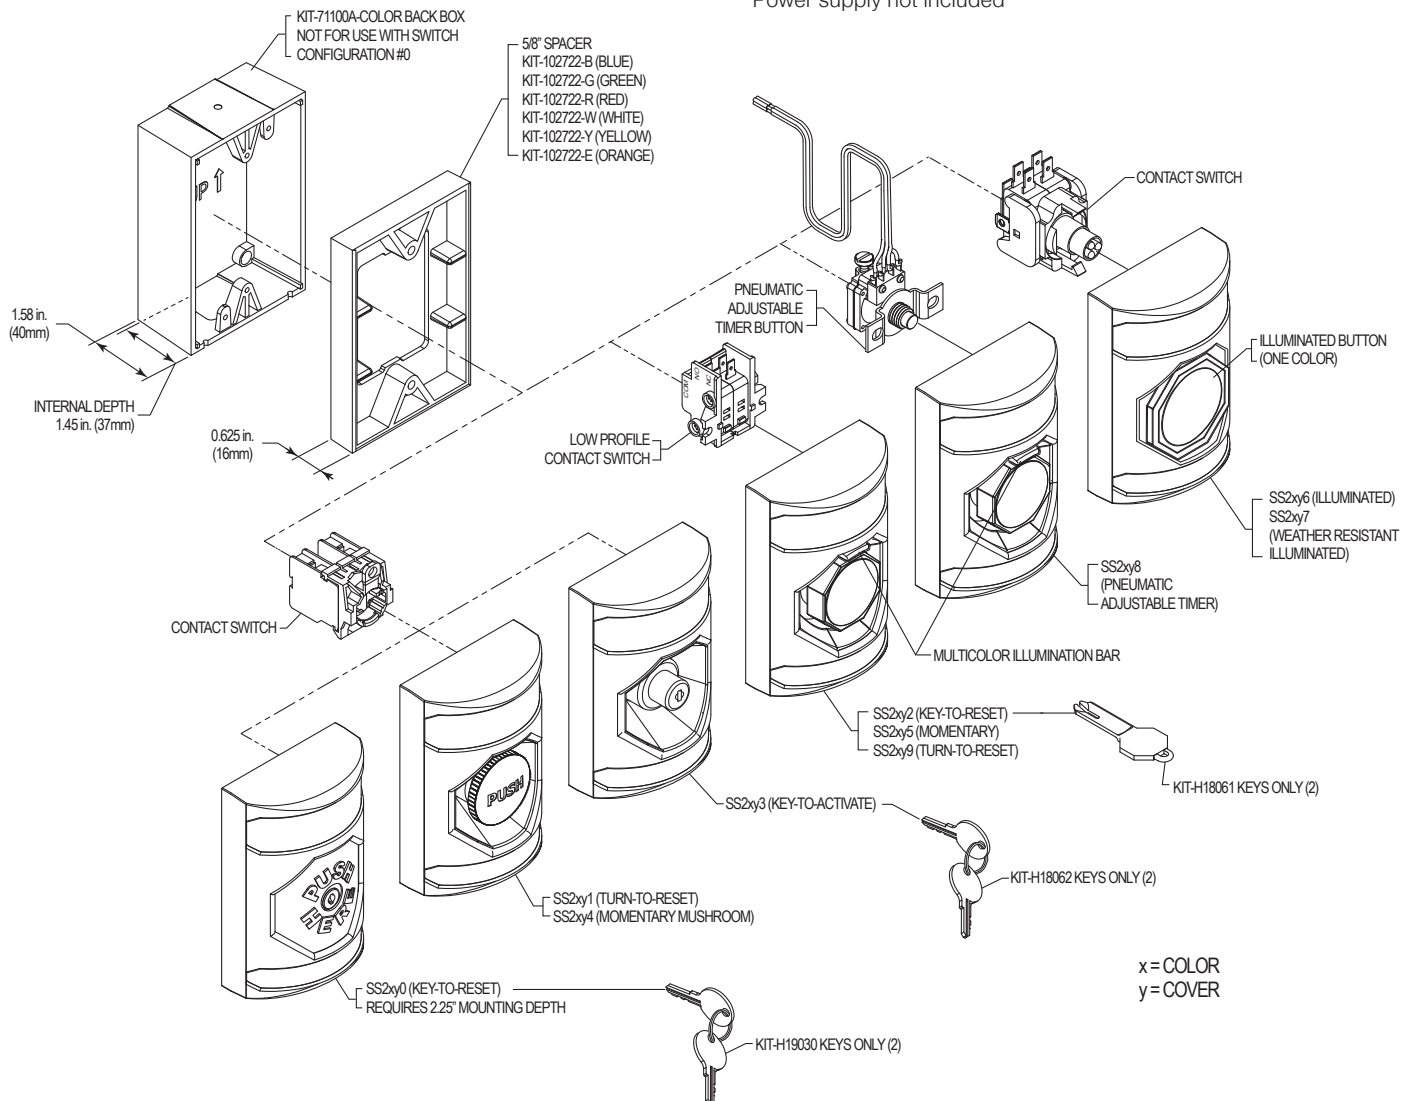

STI Stopper® Station Series

Dimensions and Technical Information

APPROVALS & WARRANTY

It has been tested and approved or listed by:

- UL/cUL Listed under File No. S7255 (SS2xy8 models excluded)
- CSA Certified to C22.2 No. 205 (SS2xy8 models excluded)
- UL/cUL Listed for indoor or outdoor use without a cover for SS2xy7 models
- UL 294 Compliant for Access Control System Units when momentary models SS2xy4, SS2xy5, and SS2xy7 are used with LT-1UL
- ADA Compliant (SS2xy3 models excluded)

WARRANTY

Three year guarantee against breakage of polycarbonate in normal use (one year on electro mechanical and electronic components).

Accessories

LT-1UL	UL Latching/Timer Module
KIT-71100A-*	Back box for switch configuration 2, 5, 6, 7, 8 and 9
KIT-71101A-*	Back box & Spacer Kit for switch configuration 1, 3 or 4
KIT-71102A-*	Back box & spacer kit for switch configuration 0
KIT-E10196	N.O. contact for switch configuration 0, 1, 3 or 4
KIT-M10197H	Replacement contact holder for switch configuration 0, 1, 3 & 4
KIT-E10198	N.C. contact for switch configuration 0, 1, 3 or 4
KIT-102720-*	Stackable 10mm Spacer, European and US Mounting
KIT-102722-*	Plastic Spacer - adds 5/8" depth
KIT-AP2100-*	Notched SS2 shell - no text
KIT-AP2100-*ZA	Notched SS2 shell - custom text
KIT-M10271-*	Unnotched SS2 shell - no text
KIT-M10271-*ZA	Unnotched SS2 shell - custom text
KIT-H19030	Two Extra Keys for switch configuration 0
KIT-H18061	Two Extra Keys for switch configuration 2
KIT-H18062	Two Extra Keys for switch configuration 3
KIT-E10197H	Pack of two contact switch holders, one N.O. and one N.C. for switch configuration 0, 1, 3 or 4

* R=red, B=blue, G=green, Y=yellow, W=white, E=orange


Protect your STI Stopper Station from damage or weather and help stop malicious or accidental activation.



Stopper® Station Shield
(Cover 2, A)

This inexpensive and highly durable cover, with or without alarm, was invented to mount directly onto the Stopper Station series of buttons with two tabs that snap into the Stopper Station shell. It takes hard knocks in stride while protecting the button against vandalism, damage and accidental activation. Ideal for use when space is limited. 3V lithium battery provided.

No labeling can be placed on the Stopper Station shield.



"A" - Contact Depth	
SS2xy0*	2.16"
SS2xy1	2.04"
SS2xy2	1.00"
SS2xy3*	2.13"
SS2xy4	2.04"
SS2xy5	1.00"
SS2xy6	.875"
SS2xy7	.875"
SS2xy8	1.4"
SS2xy9	1.00"

* If extra depth needed in electrical box order KIT-102722-color.



Universal Stopper®
(Covers 3, 4, 7, 8)

This indoor/outdoor cover helps stop false fire alarms and can protect Stopper Stations against damage as well as malicious or accidental activation. It consists of a clear polycarbonate shield that fits easily over any STI Stopper Station model. When it is lifted to gain access to the Stopper Station, the optional piercing 105 dB warning horn sounds. Legitimate activation is not affected. The protective cover options include: dome with or without horn, flush mount, surface mount.

Additional labeling may be placed on the Universal Stopper.

Note:

Stopper Station SS2xy7 models are UL/cUL Listed for outdoor use without a cover. All others are approved for outdoor use with an outdoor rated protective cover, excludes SS2xy8 models.

STI Stopper® Station Series

Dimensions and Technical Information

COLOR

0. Red
1. Green
2. Yellow
3. White
4. Blue
5. Orange

SS2

—

LANGUAGE

EN = English
ES = Spanish
FR = French

COVER

Flush

3. Universal Stopper, label shell*
4. Universal Stopper, horn*

Surface

7. Universal Stopper, label shell*
8. Universal Stopper, horn*

Flush or Surface

2. Shield
A. Shield with sound
0. No Cover

SWITCH CONFIGURATION

2. Key-to-Reset (Illuminated Bar)
5. Momentary (Illuminated Bar)
9. Turn-to-Reset (Illuminated Bar)
8. Pneumatic (Illuminated Bar)**
6. Momentary (Illuminated)
7. Weather Resistant Momentary (Illuminated)
0. Key-to-Reset* ***
1. Turn-to-Reset ***
3. Key-to-Activate ***
4. Momentary ***

TEXT

AB = ABORT *
EM = EMERGENCY
EX = EMERGENCY EXIT
PO = EMERGENCY POWER OFF *
ES = EMERGENCY STOP *
EV = EVACUATION
XT = EXIT
PS = FUEL PUMP SHUT DOWN *
HV = HVAC SHUTDOWN *
LD = LOCKDOWN *
PX = PUSH TO EXIT
NT = No Text
ZA = Custom Text

* Not available with pneumatic switch configuration 8

*Not available for orange color

*Not available in orange

** Switch configuration 8 not recommended for outdoor/water applications, temperature range 15°F to 120°F.

*** Switch configuration 0, 1, 3, 4 may require spacer KIT-102722-*

(* = R, G, Y, W, B or E) to accommodate depth or a deep single-gang box.

CUSTOMIZE YOUR TEXT - text option ZA White text on blue, red and green; black text on yellow, white and orange.

CUSTOM TEXT FOR TOP OF SHELL:

2 LINES, 20 CHARACTERS EACH (INCLUDES SPACES)

ST1

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

ST2

CUSTOM TEXT FOR BOTTOM OF SHELL:

1 LINE, 20 CHARACTERS (INCLUDES SPACES)

SB

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

CUSTOM TEXT COVER 3, 4, 7, 8:

2 LINES, 40 CHARACTERS EACH (INCLUDES SPACES)

C1

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

C2

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--



Safety Technology International
Engineered to Fit. Trusted to Perform.

Americas Headquarters
2306 Airport Road
Waterford, MI 48327, USA
info@sti-usa.com | www.sti-global.com
Tel: 248-673-9898

EMEA Headquarters
Taylor House 34 Sherwood Rd.,
Bromsgrove, Worcs., B60 3DR, England
info@sti-emea.com | www.sti-global.com
Tel: +44 (0) 1527 520 999