Southwire®

-GENESIS-

Limited-Energy Cable

Zip Cable

300V (max)	-20°C 60°C		RoHS COMPLIANT	c ETL LISTED us
Operating Voltage	Operating Temperature	Sunlight Resistant	RoHS Compliant	cETLus Listed

APPLICATIONS

Genesis Zip Cable delivers a simple and cost-effective solution for your next low-voltage project. Easy to install with a pull-apart design, Genesis Zip Cable ensures clear signal transmission for speakers, security systems, and more.

- Installed in a metal raceway that complies with 300.22(B)
- Supported by solid bottom metal cable trays with solid metal covers
- Within buildings in other than air-handling spaces and risers
- Exposed to sunlight

WE'VE GOT IT MADE IN AMERICA™


SPECIFICATIONS

Genesis Zip Cable meets or exceeds the following specifications:

- UL 1685 – General Purpose Rated
- CSA C22.2 No. 2556 – FT4 Rated
- UL 444 – Communication Cables, Type CM
- UL 13 – Power-Limited Circuit Cables, Type CL2

CONSTRUCTION

1. **Conductor:** Bare Copper conductors for excellent conductivity and low voltage drop
2. **Insulation:** PVC, Countdown® Length Markings for easy tracking of usage and remaining cable

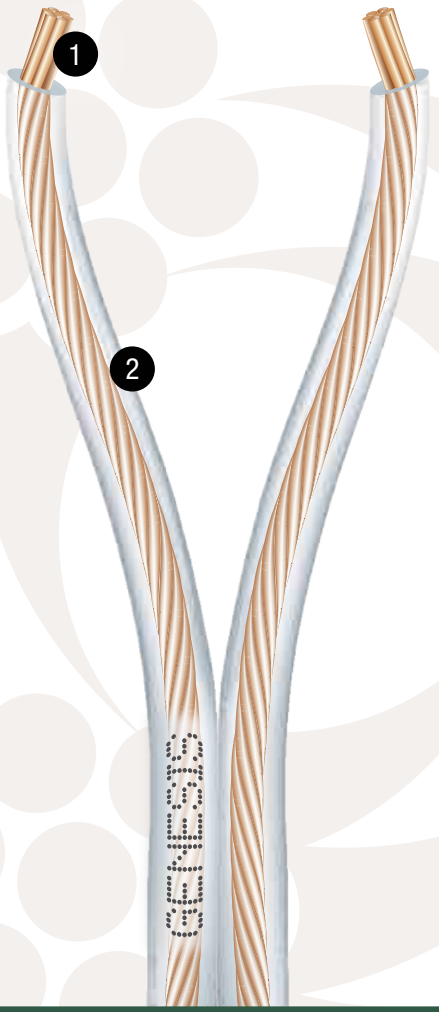

Southwire Company, LLC. • One Southwire Drive • Carrollton, GA 30119
©2025 Southwire Company, LLC. All Rights Reserved.
®Registered Trademark & ™Trademark of Southwire Company, LLC.

WE DELIVER POWER... RESPONSIBLY.®

Southwire®

-GENESIS-

Limited-Energy Cable

ZIP CABLE

AWG	NUMBER OF CONDUCTORS	SOLID / STRANDED	NOMINAL O.D. (in.)	DC RESISTANCE (Ohms/1000ft. at 20ºC)	CAPACITANCE (pF/ft.)	WEIGHT (lbs./1000ft.)	PRODUCT NUMBER
22	2	7 strand	0.074 x 0.164	16.9	24.3	8.6	1002
18	2	19 strand	0.090 x 0.190	6.66	29.8	15.7	1004

SAMPLE PRINT LEGEND

GENESIS P/N 10XX XC XXAWG (ETL) CL2 OR CM C(ETL)US FT4 SUN RES 75C (RoHS)
W/O #XXXXXX-XXXXXX XXXX FT A B C D E F 1 2 3 4 5 6 7 8 9

Southwire Company, LLC. • One Southwire Drive • Carrollton, GA 30119

©2025 Southwire Company, LLC. All Rights Reserved.
®Registered Trademark & ™Trademark of Southwire Company, LLC.

WE DELIVER POWER... RESPONSIBLY.®